



RELIABILITY BUILT IN

B-0113 and B-0113-B Pre-Rinse Units

Description

Deck mounted single hole base pre-rinse units with "pop and lock" riser installation feature

Model

- B-0113** Easy Install "Pop and Lock" Pre-Rinse Unit
- B-0113-B** Easy Install "Pop and Lock" Pre-Rinse Unit with Wall Bracket

Flow Rate

- 1.42 GPM at 60 PSI

Specifications

Chrome Plated Brass Faucet Body, Deck Mounted Pre-rinse Units with the following features:

- Single hole base faucet with 4" spreader unit
- Spring action gooseneck
- 45" high • 14" overhang • 19-3/8" clearance
- 24" riser (000372-40) • Finger hook for spray valve
- B-0107 spray valve • B-0044-H flexible stainless steel hose
- Internal spring checks to prevent cross flow
- 1/2" NPT male inlets/compression fittings for 5/8" O.D. tubing (convertible)


B-0113-B includes a B-0109-01 wall bracket

Notes:

Alternate handles available – see pages 93-94

Pre-Rinse Dimensions

B-0113-B

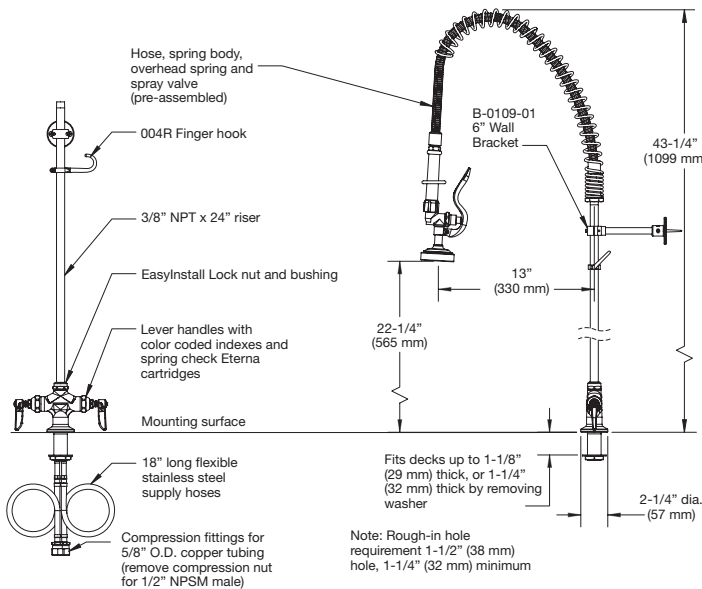

B-0113-B

Easy Install

Features

- Pre-assembled hose, spring body, overhead spring and spray valve
- "Pop and lock" riser installation
- Deck mounted faucet
- Forged brass construction • Chrome plated finish

Compliant to:

- ASME A112.18.1M
- CSA B125
- EPAct 2005
- NSF 61, Sec. 9
- ADA

Warranty

1 year (limited)

Made in the USA



This space for Architect/Engineer Approval

Job Name _____	Date _____
Model Specified _____	Quantity _____
Variations Specified _____	
Customer/Wholesaler _____	
Contractor _____	
Architect _____	

The information contained in this document is subject to change without notice.

T&S Brass and Bronze Works, Inc. • 2 Saddleback Cove, P.O. Box 1088 • Travelers Rest, SC 29690
Ph 864-834-4102 • Fax 864-834-3518 • Web www.tsbrass.com

B-0113 and B-0113-B Pre-Rinse Units S.S. – Rev. 1 (5/08)

Copyright © 2008 T&S Brass and Bronze Works, Inc. Printed in the USA